

## Low Voltage, 300-MHz - 3 dB Bandwidth, SPDT Analog Switch with Power Down Protection

(2:1 Multiplexer/Demultiplexer Bus Switch)

#### **DESCRIPTION**

The DG3157A, DG3157B are high-speed single-pole double-throw, low voltage switch. Using sub-micro CMOS technology, the DG3157A, DG3157B achieves low on-resistance and negligible propagation delay. The DG3157A, DG3157B can handle both analog and digital signals and permits signals with amplitudes of up to  $V_{CC}$  to be transmitted in either direction. Select pin of control logic input can be over the V+. When the select pin is low,  $B_0$  is connected to the output A pin. When the select pin is high,  $B_1$  is connected to the output A pin. The path that is open will have a high-impedance state with respect to the output A pin. Break before make is guaranteed. The DG3157A has an internal pull down resistor on the control pin S, while the DG3157B does not.

#### **FEATURES**


 Ultra small miniQFN6 package of 1 mm x 1.2 mm




Wide operation voltage range: 1.8 V to 5.5 V  $\,$ 

- RoHS\*
- Useful in both analog and digital signal switching
- 300 MHz 3 dB bandwidth
- · Power down safe design
- Low voltage logic threshold:
   V<sub>th</sub>(high) = 1.2 V at V+ = 3.3 V
- · Minimal propagation delay
- · Break-before-make switching
- Zero bounce in flow-through mode
- > 300 mA latch up current per JESD78
- > 8 kV ESD/HBM
- DG3157A version has internal pull down resistor on control pin S

#### **FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION**



Device Marking: E miniQFN-6 DG3157B



Device Marking: D

TRUTH TABLE	
Logic Input (S)	Function
0	B <sub>0</sub> Connected to A
1	B <sub>1</sub> Connected to A

ORDERING INFORMATION						
Temp. Range	Part Number					
- 40 °C to 85 °C	miniQFN-6	DG3157ADN-T1-E4				
	IIIIIIQFN-0	DG3157BDN-T1-E4				

<sup>\*</sup> Pb containing terminations are not RoHS compliant, exemptions may apply.

## DG3157A, DG3157B

## Vishay Siliconix



ABSOLUTE MAXIMUM RATINGS						
Parameter		Limit	Unit			
Reference V+ to GND	- 0.3 to + 6	V				
S, A, B <sup>a</sup>	- 0.3 to (V+ + 0.3)	v				
Continuous Current (Any terminal)	± 50	mΛ				
Peak Current (Pulsed at 1 ms, 10 % duty cy	± 200	mA				
Storage Temperature	D-Suffix	- 65 to 150	°C			
Power Dissipation (Packages) <sup>b</sup>	miniQFN-6 <sup>c</sup>	160	mW			

#### Notes:

- a. Signals on A, or B or S exceeding V+ will be clamped by internal diodes. Limit forward diode current to maximum current ratings.
- b. All leads welded or soldered to PC board.
- c. Derate 2.0 mW/°C above 70 °C.

		Test Conditions Unless Otherwise Specified $V+=3.0\ V,\ V_{SL}=0.5\ V,\ V_{SH}=2.0\ V^e$			Limits - 40 °C to 85 °C			
Parameter	Symbol			Temp.a	Min. <sup>b</sup>	Typ.c	Max. <sup>b</sup>	Unit
DC Characteristics								
		V+ = 1.65 to 1.95 V			1.2			
High Level Input Voltage	$V_{SH}$	V+ = 2.0 to 2.6 V		]	1.4			
riigii zovoriiipat voltago	- 311	V+ = 2.7 to 3.6 V			2.0			
			= 4.5 to 5.5 V	Full	2.4			V
			= 1.65 to 1.95 V				0.3	
Low Level Input Voltage	$V_{SL}$		= 2.0 to 2.6 V				0.4	
g	OL		= 2.7 to 3.6 V	]			0.5	
		V+	= 4.5 to 5.5 V				0.8	
			$V_{BN} = 0 \text{ V}, I_{A} = 30 \text{ mA}$			4.8	7	Ω
		V+ = 4.5 V	$V_{BN} = 2.4 \text{ V}, I_{A} = -30 \text{ mA}$			5.7	12	
	R <sub>ON</sub>		$V_{BN} = 4.5 \text{ V}, I_{A} = -30 \text{ mA}$			10.3	15	
		V+ = 3.0 V	$V_{BN} = 0 \text{ V}, I_A = 24 \text{ mA}$	Full		5.9	9	
On-Resistance			$V_{BN} = 3.0 \text{ V}, I_A = -24 \text{ mA}$			13.7	20	
		V+ = 2.3 V	$V_{BN} = 0 \text{ V}, I_{A} = 8 \text{ mA}$			7	12	
			$V_{BN} = 2.3 \text{ V}, I_{A} = -8 \text{ mA}$			16.2	30	
		V+ = 1.65 V	$V_{BN} = 0 \text{ V}, I_{A} = 4 \text{ mA}$			9.2	20	
		V+= 1.65 V	$V_{BN} = 1.65 \text{ V}, I_A = -4 \text{ mA}$			24	50	
	R <sub>FLAT</sub>	0 < V <sub>BN</sub> < V+	$V+ = 4.5 \text{ V}, I_A = -30 \text{ mA}$	Room		8		
On-Resistance Flatness			$V+ = 3.0 \text{ V}, I_A = -24 \text{ mA}$			13		
On-nesistance matriess			$V+ = 2.3 \text{ V}, I_A = -8 \text{ mA}$			24		
			V+ = 1.65 V, I <sub>A</sub> = - 4 mA			89		
	4 <b>D</b>	V+ = 4.5 V, V <sub>BN</sub> = 3.15 V, I <sub>A</sub> = - 30 mA		noom		0.8		
On-Resistance Matching Between Channels		V+ = 3.0 V, V <sub>BN</sub> = 2.1 V, I <sub>A</sub> = - 24 mA				0.1		
	$\Delta R_{ON}$	V+ = 2.3 V, V <sub>BN</sub> = 1.6 V, I <sub>A</sub> = -8 mA				0.2		
		V+ = 1.65 V, V <sub>BN</sub> = 1.15 V, I <sub>A</sub> = - 4 mA				0.9		
Input Leakage Current	IS	V+ = 5.5 V, $V_A = 5.5 V,$ $V_S = 0.8 V, 2.4 V$	DG3157B	Full -	- 1.0		1.0	
,			DG3157A		- 1.0	2.5	7.0	
Off Stage Switch Leakage	I <sub>BN(off)</sub>	$V+ = 5.5 \text{ V}, V_A/V_B = 0 \text{ V}/5.5 \text{ V}$		Room Full	- 0.1 - 1.0		0.1 1.0	μA
On State Switch Leakage	I <sub>BN(on)</sub>	$V+ = 5.5 \text{ V}, V_A/V_B = 0 \text{ V}/5.5 \text{ V}$		Room Full	- 0.1 - 1.0		0.1 1.0	



SPECIFICATIONS								
		Test Conditions Unless Otherwise Specified $V+=3.0 \text{ V}, V_{SL}=0.5 \text{ V}, V_{SH}=2.0 \text{ V}^e$			Limits			
				_ a		0 °C to 85		
Parameter Power Supply	Symbol	V+ = 3.0 V, V <sub>SL</sub> = 0.	.5 v, v <sub>SH</sub> = 2.0 v	Temp. <sup>a</sup>	Min.b	Typ. <sup>c</sup>	Max.b	Unit
Power Supply Range	V+	T		Full	1.65	1	5.5	l v
		.,,		Room	1.03		1	
Quiescent Supply Current	l+	$V+ = 5.5 V, V_A =$	= V+ or GND	Full			10	μΑ
AC Electrical Characteristice								
			V+ = 1.65 to 1.95 V	Full		1.5		
Prop Delay Time <sup>f</sup>	t <sub>PHL</sub> /t <sub>PLH</sub>	V <sub>A</sub> = 0 V	V+ = 2.3 to 2.7 V	Full		0.8		
Trop Delay Time	THE TEN	A S	V+ = 3.0 to 3.6 V	Full		0.4		
			V+ = 4.5 to 5.5 V	Full		0.3		
			V+ = 1.65 to 1.95 V	Room Full		27	50	
Outside Freehle Timef	t <sub>PZL</sub> /t <sub>PZH</sub>	$V_{LOAD} = 2 \times V + \text{ for } t_{PZL}$	V+ = 2.3 to 2.7 V	Room Full		15	45	
Output Enable Time <sup>†</sup>	'PZL''PZH	V <sub>LOAD</sub> = 0 V for t <sub>PZH</sub>	V+ = 3.0 to 3.6 V	Room Full		10	30	
			V+ = 4.5 to 5.5 V	Room Full		7	25	
		$V_{LOAD} = 2 \times V + \text{ for } t_{PLZ}$ $V_{LOAD} = 0 \text{ V for } t_{PHZ}$	V+ = 1.65 to 1.95 V	Room Full		16	45	ns
			V+ = 2.3 to 2.7 V	Room Full		10	40	
Output Disable Time <sup>f</sup>	t <sub>PLZ</sub> /t <sub>PHZ</sub>		V+ = 3.0 to 3.6 V	Room		8	35	
			V+ = 4.5 to 5.5 V	Room		6	21	
		V+ = 1.65 t	V+ = 1.65 to 1.95 V		0.5	11		
d		V+ = 2.3 to 2.7 V		Full	0.5	6		
Break-Before-Make Time <sup>d</sup>	t <sub>BBM</sub>	V+ = 3.0 to 3.65		Full	0.5	4		1
		V+ = 4.5 to 5.5 V		Full	0.5	3		
Ola a constant and	Q	C <sub>L</sub> = 1 nF, V <sub>GEN</sub> = 0 V	V+ = 5 V	Room		7		20
Charge Injection <sup>d</sup>	Q	$R_{GEN} = 0 \Omega$	V+ = 3.3 V	Room		5		рC
Off Isolation <sup>d</sup>	OIRR	P = 50 O f	_ 10 MU-	Room		- 57		40
Crosstalk <sup>d</sup>	X <sub>TALK</sub>	$R_L = 50 \Omega$ , f	- IO WII IZ	Room		- 64		dB
- 3 dB Bandwidth <sup>d</sup>	BW	$R_L = 50 \Omega$		Room		300		MHz
Total Harmonic Distortion <sup>d</sup>	THD	$R_L = 600 \Omega$ , 0.5 Vp-p f = 600 Hz - 20 kHz		Room		0.016		%
Capacitance		1		<u> </u>				
Control Pin Capacitanced	C <sub>S</sub>	V+ =	0 V	Room		3.7		
B Port Off Capacitance <sup>d</sup>	C <sub>IO-B</sub>			Room		7		pF
A Port Capacitance When Switch Enable <sup>d</sup>	C <sub>IO-A(on)</sub>	V+ = 5 V		Room		19		, pi

#### Notes:

- a. Room = 25  $^{\circ}\text{C},\,\text{Full}$  = as determined by the operating suffix.
- b. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.
- c. Typical values are for design aid only, not guaranteed nor subject to production testing.
- d. Guarantee by design, nor subjected to production test.
- e.  $V_S$  = input voltage to perform proper function.
- f. Guaranteed by design and not production tested. The bus switch propagation delay is a function of the RC time constant contributed by the on-resistance and the specified load capacitance with an ideal voltage source (zero output impedance) driving the switch.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

# VISHAY.

#### **LOGIC DIAGRAM** Positive Logic

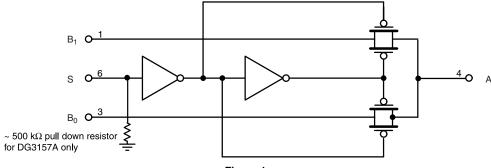


Figure 1.

#### **AC LOADING AND WAVEFORMS**

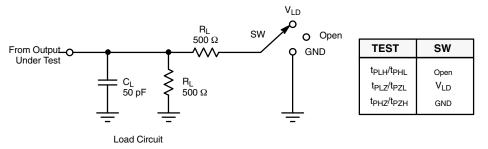


Figure 2. AC Test Circuit

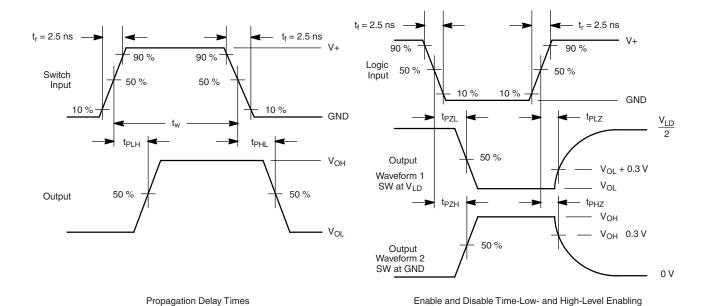



Figure 3. AC Waveforms

#### Notes:


- C<sub>L</sub> includes probe and jig capacitance.
- Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control.
- Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- All input pulses are supplied by generators having the following characteristics: Input PRR = 1.0 MHz, t<sub>w</sub> = 500 ns.
- The outputs are measured one at a time with one transition per measurement.
- V<sub>LD</sub> = 2 V+.




## **TYPICAL CHARACTERISTICS** $T_A = 25$ °C, unless otherwise noted



 $R_{ON}$  vs.  $V_A$  and Supply Voltage




Switching Threshold vs. Supply Voltage



Insertion Loss, Off-Isolation, Crosstalk vs. Frequency

# VISHAY.

#### **TEST CIRCUITS**

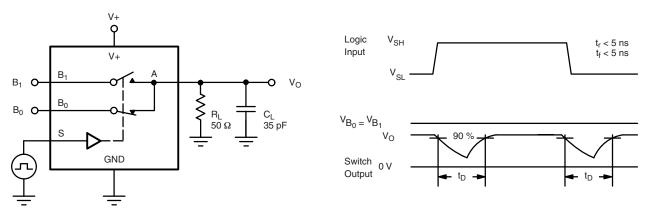

C<sub>L</sub> (includes fixture and stray capacitance)

Figure 4. Break-Before-Make Interval

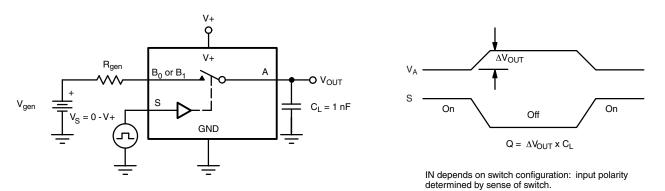


Figure 5. Charge Injection

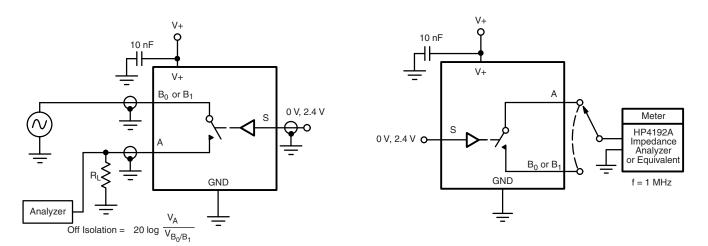



Figure 6. Off-Isolation


Figure 7. Channel Off/On Capacitance


Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see <a href="http://www.vishay.com/ppg?68628">http://www.vishay.com/ppg?68628</a>.




#### **MINI QFN-6L CASE OUTLINE**










DIM	M	IILLIMETER	S	INCHES			
Dilvi	MIN.	NAM.	MAX.	MIN.	NAM.	MAX.	
Α	0.50	0.55	0.60	0.0197	0.0217	0.0236	
A1	0.00	-	0.05	0.000	-	0.002	
b	0.15	0.20	0.25	0.006	0.008	0.010	
С		0.15 REF			0.006 REF		
D	1.15	1.20	1.25	0.045	0.047	0.049	
E	0.95	1.00	1.05	0.037	0.039	0.041	
е		0.40 BSC			0.016 BSC		
L	0.30	0.35	0.40	0.012	0.014	0.016	
L1	0.40	0.45	0.50	0.016	0.018	0.020	

ECN T-07039-Rev. A, 12-Feb-07 DWG: 5958



#### **RECOMMENDED MINIMUM PADS FOR MINI QFN 6L**

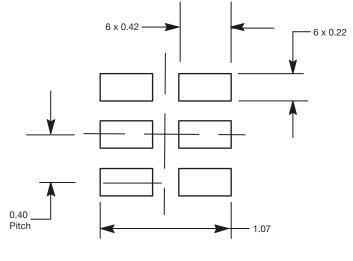

Mounting Footprint Dimensions in mm



### **Legal Disclaimer Notice**

Vishay

### **Disclaimer**

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.